


Note: Suitable for pedestrian traffic only

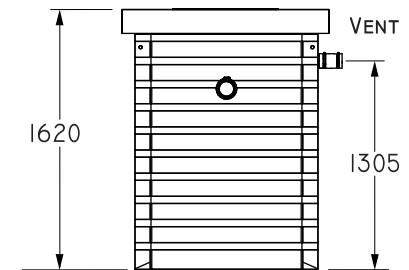

Specifications

Tank: High Density Polyethylene

Baffles: Low Density Polyethylene

Cover: Reinforced Concrete

Access: 2 x Class A Sealed Cast Iron 600 x 600

Inlet: Flexible Connector to suit 100mm DWV PVC

Outlet: Flexible Connector to suit 100mm DWV PVC

Vent: Flexible Connector to suit 80mm DWV PVC



Waste Water Services

28 Juna Drive Malaga WA.

Ph: (08) 9248 6113 Fax: (08) 9248 6117

email: sales@wastewaterservices.com.au

2000Ltr Grease Arrestor